

WINDTRAK™ LED LIGHT

Illuminates WindTrak™ wind indicators for perfect night sailing

RUGGED LED BULB

Low current draw of less than 25 milliamps at 12 volts.

EASY TO MOUNT



Use with WindTrak 10, WindTrak 15, or J-Base mounting sockets.

TRUE WHITE LIGHT


Non-dazzling LED provides just enough lumens to light up WindTrak tabs and reflectors.

WATERPROOF

Lens and body fit together tightly. Metal parts are non-corrosive silver.

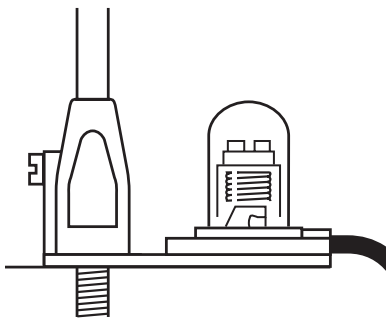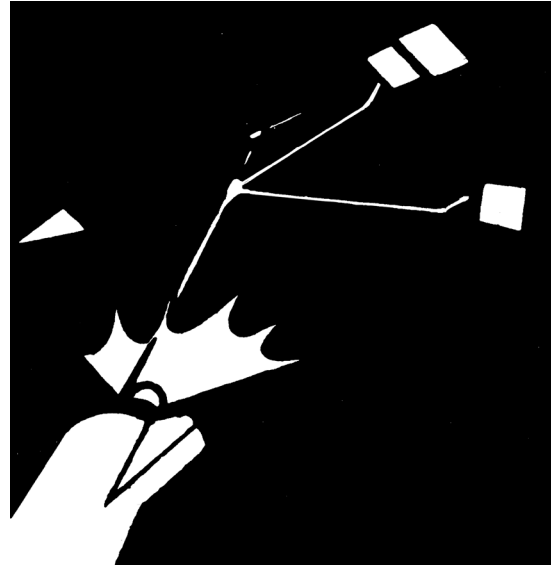


WindTrak Light with **WindTrak 15** (#3150).
Mounts directly on the threaded part of the mounting sockets.

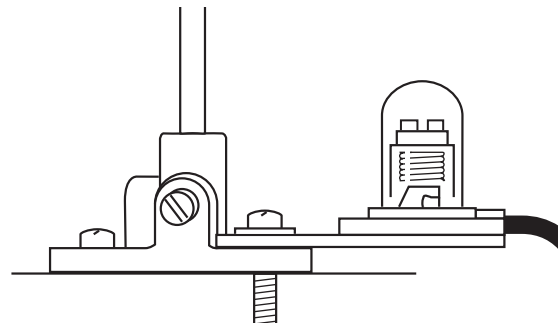

WindTrak Light with **WindTrak 10** (#3120) or **J-Base** mounting sockets (#3125, #3155).

Use 1/4" flat washer (not included) for mounting to J-Base.

This state-of-the-art LED bulb is polarized.
Be sure to follow the correct polarity.



Replacement Bulb

Buy a white surface mount LED,
Edison 10 mm (0.4") diameter base.
30 watt, 12 volt, 0.1 amp.

Davis Instruments

3465 Diablo Avenue, Hayward, CA 94545 U.S.A.
www.davisinstruments.com