




Instructions for Mega-Light™ Ultimate Cockpit #3320

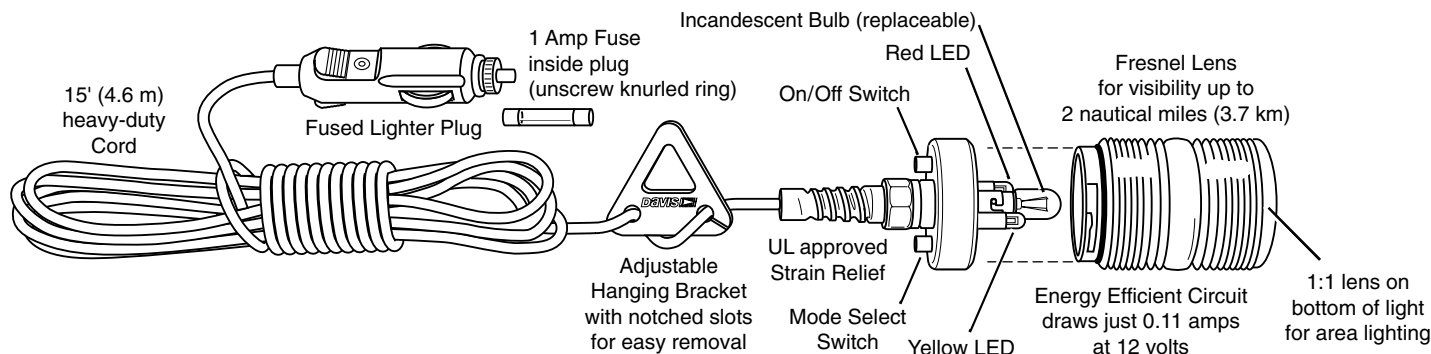

Mega-Light™ Ultimate Cockpit light features an energy efficient circuit designed to provide extremely low current lighting. Two replaceable bulbs included for low current draw or extra brightness. The low current bulb draws just 0.11 amps at 12 volts. The extra bright bulb draws .32 amps.


Mega-Light Ultimate Cockpit includes two waterproof switches— an on/off switch and a mode switch. Mode switch activates six functions:

- Steady white, red, or yellow
- Flashing red, flashing yellow, or alternating red/yellow

The Fresnel lens amplifies in two directions: the center of the lens focuses light (pinpoints the light) to project it up to two nautical miles (3.7 km); the bottom of the lens is a magnifier for area flood or task lighting at the cart table, below, or in the cockpit.

To suspend the light from a mast, boom or awning, simply tie a halyard or line to the triangular hanging bracket.

Both LEDs are guaranteed for 100,000 hours of service and should never need replacing. Should you ever need a replacement incandescent bulb, contact your dealer or Davis Instruments for replacement bulbs (Davis #3330). To replace the bulb, gently twist and pull the lens housing until it comes apart from the base. The bulb features a bayonet base and is removed by gently pushing down and twisting counter-clockwise.

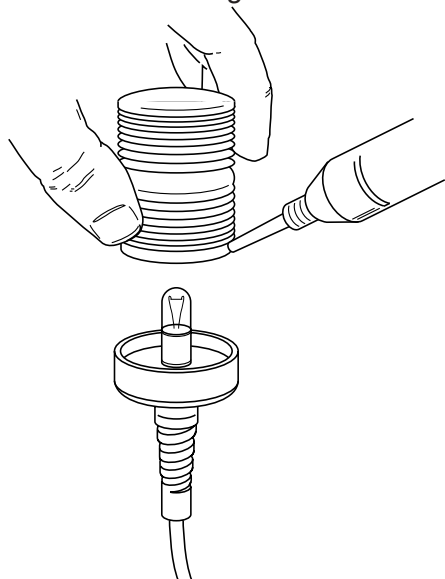

A little silicon lubricant on the O-rings occasionally will keep them watertight for years to come.

The cord is heavy-duty and the strain relief is UL approved and pull tested to 30 pounds (13.5 kilos).

Replacement Parts

Contact your dealer or Davis Instruments for replacement parts.

- | | |
|--------|---|
| 3330 | Spare Bulbs: extra bright bulb and super low current bulb |
| R3300A | Triangular Cord Hanger |
| R3300B | Cigarette Lighter Plug with fuse |
| R3300C | Spare Lens |

Davis Instruments

3465 Diablo Avenue, Hayward, CA 94545, U.S.A.
Phone (510) 732-9229 • Fax (510) 732-9188
info@davisnet.com • www.davisnet.com